

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 April 2005 (21.04.2005)


PCT

(10) International Publication Number  
**WO 2005/036094 A1**

- (51) International Patent Classification<sup>7</sup>: **F42C 14/08**, 15/44
- (21) International Application Number:  
PCT/HR2004/000040
- (22) International Filing Date: 15 October 2004 (15.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
P20030841A 16 October 2003 (16.10.2003) HR
- (71) Applicant and  
(72) Inventor: PERVAN, Boris [HR/HR]; Laniste br. 5, 10000 Zagreb (HR).
- (74) Agent: INOVA d.o.o.; Trg Zrtava Fasizma 14, 10000 Zagreb (HR).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SUPPLEMENT TO MINES BY WHICH THE TIME PERIOD IS LIMITED WITHIN WHICH THE ACTIVATION OF MINES AFTER THEIR PLACING IS POSSIBLE

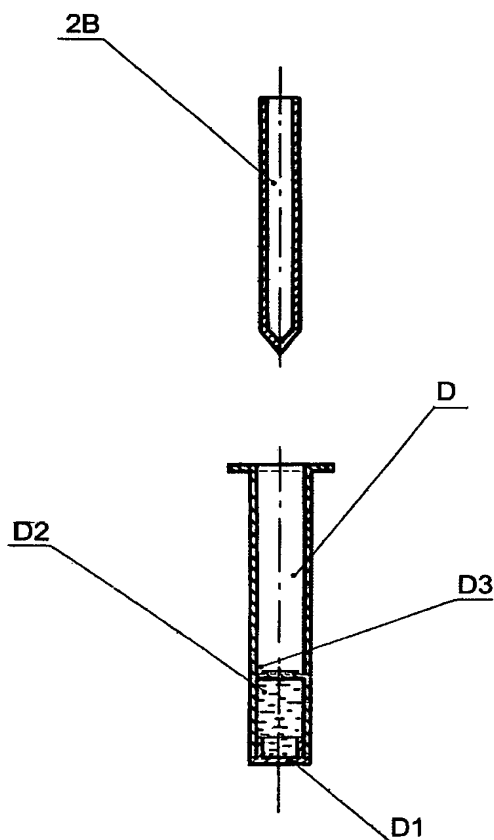

(57) Abstract: The invention consists of initial part (2B), which at the lower side is made in pyramid form and is part of mine activating mechanism (1). At its screwing into mine body (3), ampoule (D2) containing the aggressive matter is broken by the sharp point, the matter spills and comes to initial part (2B) that gets immersed in it. The aggressive matter slowly corrodes the walls of initial part (2B) and, when it corrodes them through, it mixes with the initial explosive placed inside initial part (2B), soaks it and neutralizes it, in such a way the initial explosive loses its explosive properties, and the mine cannot be activated any more. Cylindrical housing (D) serves for placing ampoule (D2) and retaining the aggressive liquid after breaking ampoule (D2).



**Published:**

- with international search report
- with amended claims

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*